


# ANM Range

Cell Type	Fully Charged Rated Capacity Ah (C5)	Nominal Voltage (V)	Dimension			Weighth (kg)
			Height (mm)	Width (mm)	Length (mm)	
ANM 8-4	8	4.8	270	123	133	5.4
ANM 8-5	8	6	270	123	162	6.8
ANM 8-6	8	7.2	270	123	192	8.1
ANM 16-4	16	4.8	270	123	133	6.1
ANM 16-5	16	6	270	123	162	7.6
ANM 16-6	16	7.2	270	123	192	9.1
ANM 24-4	24	4.8	270	123	153	7.2
ANM 24-5	24	6	270	123	187	9.0
ANM 24-6	24	7.2	270	123	222	10.8
ANM 32-4	32	4.8	270	123	201	10.0
ANM 32-5	32	6	270	123	247	12.4
ANM 32-6	32	7.2	270	123	293	12.8
ANM 40-4	40	4.8	270	123	249	12.3
ANM 40-5	40	6	270	123	307	15.3
ANM 40-6	40	7.2	270	123	365	18.3
ANM 48-4	48	4.8	270	123	249	13.7
ANM 48-5	48	6	270	123	307	17.0
ANM 48-6	48	7.2	270	123	365	20.3
ANM 71-2	71	2.4	406	195	97	10.2
ANM 71-3	71	3.6	406	195	133	14.6
ANM 95-2	95	2.4	406	195	112	13.3
ANM 95-3	95	3.6	406	195	155	19.4
ANM 119-2	119	2.4	406	195	133	15.8
ANM 119-3	119	3.6	406	195	187	23.2
ANM 142-2	142	2.4	406	195	145	18.5
ANM 142-3	142	3.6	406	195	205	27.0
ANM 166-2	166	2.4	406	195	184	22.8
ANM 166-3	166	3.6	406	195	263	33.6
ANM 190-2	190	2.4	406	195	198	25.5
ANM 190-3	190	3.6	406	195	284	37.7
ANM 238-2	238	2.4	406	195	241	30.5
ANM 238-3	238	3.6	406	195	349	45.3
ANM 285-2	285	2.4	406	195	265	33.6
ANM 285-3	285	3.6	406	195	385	49.9
ANM 357-1	357	1.2	406	195	187	23.2
ANM 357-2	357	2.4	406	195	349	45.0
ANM 426-1	426	1.2	406	195	205	27.0
ANM 476-1	746	1.2	406	195	241	30.2

## Charging Data (at 20°C)

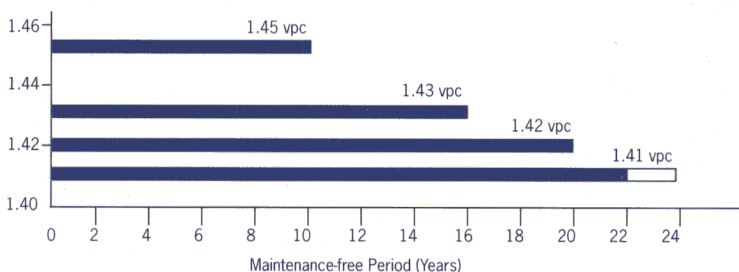

Float Volts per Cell (Single rate charge)	% Recharge of Tabular Discharge Data	
	8 hours	24 hours
1.42	66	86
1.45	70	88

Dual rate charge can be used to improve recharge times. Refer to company for this operation and for operation at temperature extremes